


DIMENSIONS

1. Ring-Tite and Enviro-Tite

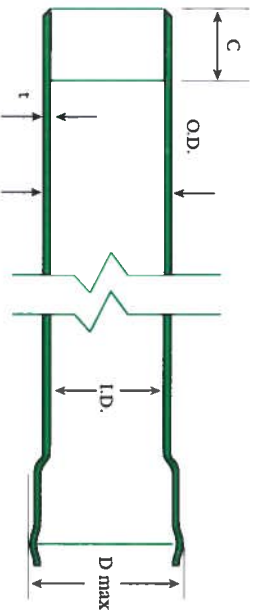


- where, O.D. = average outside diameter
- I.D. = average inside diameter
- t = minimum wall thickness
- Dmax = approximate outside diameter of the bell
- C = insertion depth distance

Note: Bell profiles are for information only.
Actual profiles may vary

Enviro-Tite available in all DR28 sizes & DR35 from 100 - 375 mm.

Pipe Size		O.D.		I.D.		t		Dmax		C	
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.
DR28											
100	* 4	107.1	4.22	99.0	3.90	3.8	0.15	135	5.31	71	2.8
125	* 5	143.3	5.64	132.5	5.22	5.1	0.20	173	6.81	72	2.8
150	* 6	159.4	6.28	147.3	5.80	5.7	0.22	191	7.52	89	3.5
DR35											
100	4	107.1	4.22	100.7	3.96	3.1	0.12	133	5.24	71	2.8

2. Ultra-Rib

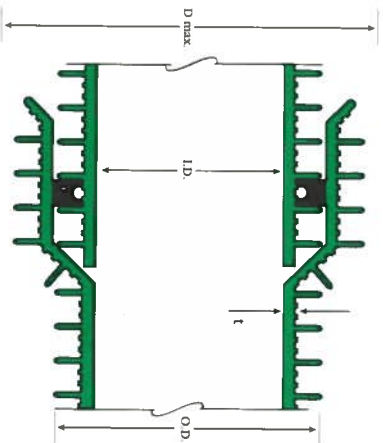

- where, O.D. = average outside diameter of barrel
- I.D. = average inside diameter
- t = minimum waterway wall thickness
- Dmax = approximate outside diameter of bell

Pipe Size		O.D.		I.D.		t		Dmax	
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.
200	8	224	8.8	200	7.87	2.20	0.09	248	9.8
250	10	280	11.0	251	9.88	2.30	0.09	311	12.2
300	12	333	13.1	298	11.73	2.60	0.10	371	14.6
375	15	408	16.1	365	14.37	2.80	0.11	453	17.8
450	18	497	19.6	448	17.64	3.30	0.13	556	21.9
525	21	584	23.0	527	20.75	4.06	0.16	665	26.2