



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1300-C-xx-I style)



SERIES 1300-C 14" - 42" RESTRAINT DEVICE FOR PVC PIPE AND MECHANICAL JOINT FITTINGS

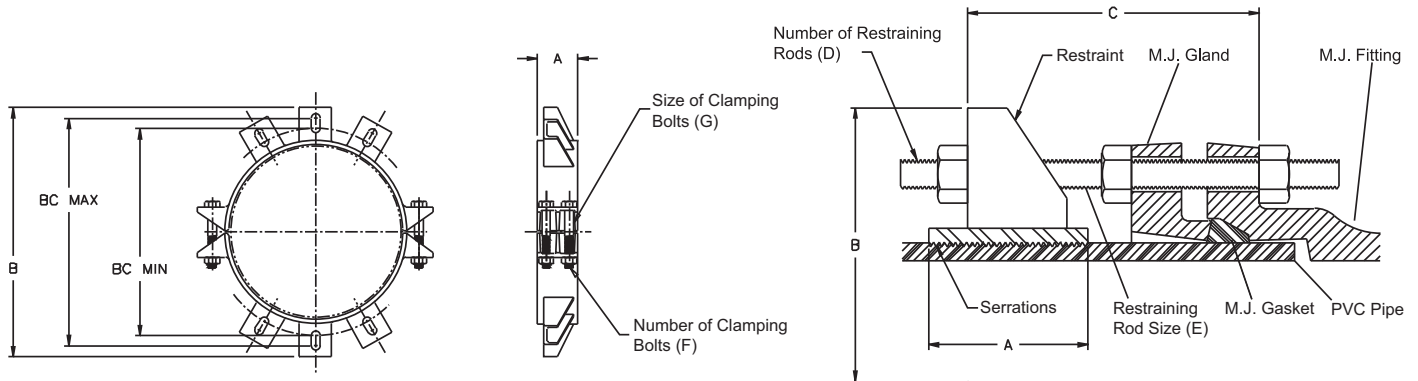

NOM PIPE SIZE	PVC PIPE WITH DI PIPE OD STYLE 1300-C		A	B APPROX	C MAX	RESTRAINING RODS		CLAMPING BOLTS		BC MIN	BC MAX	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
	OD	CATALOG No.				QTY.	SIZE	QTY.	SIZE				
						D	E	F	G				
14"	15.30	UFR1300-C-14-I	4"	22-5/16"	15"	6	3/4" x 17"	4	7/8" x 7"	18.50"	20.50"	72	
16"	17.40	UFR1300-C-16-I	4"	24-27/64"	15"	6	3/4" x 17"	4	7/8" x 7"	20.50"	22.50"	77	
18"	19.50	UFR1300-C-18-I	5"	26-35/64"	15"	8	3/4" x 17"	4	1" x 7"	22.75"	24.75"	109	
20"	21.60	UFR1300-C-20-I	5"	28-55/64"	22"	8	3/4" x 24"	4	1-1/8" x 9"	25.00"	27.00"	144	
24"	25.80	UFR1300-C-24-I	5"	33-35/64"	22"	12	3/4" x 24"	4	1-1/8" x 9"	29.50"	31.50"	220	
30"	32.00	UFR1300-C-30-I	7"	40-57/64"	22"	12	1" x 24"	6	1-1/8" x 6"	36.18"	38.18"	315	
36"	38.30	UFR1300-C-36-I	7"	48-23/64"	22"	12	1" x 24"	6	1-1/8" x 6"	42.50"	45.50"	357	
42"	44.50	UFR1300-C-42-I	10-3/4"	57-9/16"	22"	16	1-1/4" x 24"	8	1-1/8" x 6"	49.13"	54.13"	487	

FEATURES

- 14" - 42" sizes: Cast ductile iron per ASTM A536, grade 65-45-12
- 360° contact and support of the pipe wall
- Ideal companion for push-on fittings with restraint ears
- Rods (included) are high strength, low alloy steel ANSI / AWWA C111 / A21.11
- Rated at full-rated pressure of any class of PVC pipe, minimum 2:1 safety factor
- Black epoxy coating

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com



05/14/18

Submitted By: