



SUBMITTAL INFORMATION

Uni-Flange Restraint - (UFR1360-C-xx-I style)




UNI-FLANGE 1360-C RESTRAINT DEVICE FOR PVC PIPE PRESSURE FITTINGS PIPE SIZES 10" - 12"


1300 Restraint

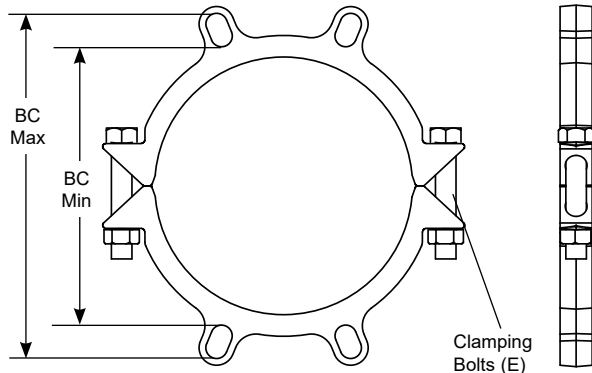

1360 Assembly

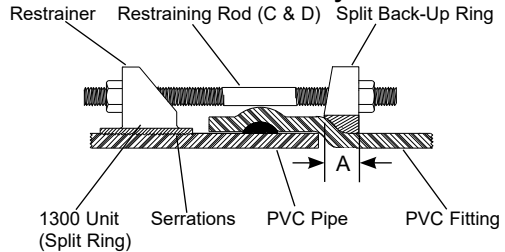

1360 Back-Up Ring

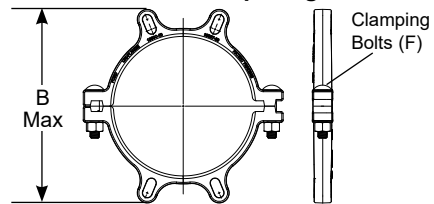



NOM PIPE SIZE	PVC PIPE WITH DI PIPE OD STYLE 1360-C		BACK-UP RING		RESTRAINTS BOLTS / RODS		CLAMPING BOLTS		1300 RESTRAINT		✓ SUBMITTED ITEMS
							1300 RESTRAINT	1360 BACK-UP RING			
			OD	CATALOG No.	A	*B MAX	No. C	SIZE D	E	F	
10"	11.10	UFR1360-C-10-I	1-3/4"	19-3/8"	4	3/4" x 17"	(2) 7/8" x 5"	(2) 7/8" x 4-1/2"	13.50"	15.00"	
12"	13.20	UFR1360-C-12-I	2-1/2"	22-1/2"	4	3/4" x 17"	(2) 7/8" x 5"	(2) 7/8" x 4-1/2"	15.62"	17.62"	

* Max measurement when in perched position

Back-Up Ring Range and Orientation

NOM. PIPE SIZE	LOW RANGE (NESTED)	BC MIN	BC MAX	HIGH RANGE (PERCHED)	BC MIN	BC MAX
10"	12.00"-12.50"	15.04"	17.04"	12.51"-13.00"	15.50"	17.50"
12"	14.25"-14.75"	17.94"	19.94"	14.76"-15.50"	18.63"	20.63"

Select the low or high range from this table that includes the measured bell run O.D. Orientate the back-up ring sections (nested or perched) as illustrated according to the selected range.

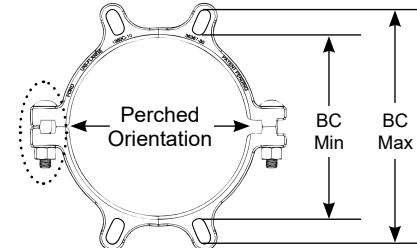

FEATURES

- Split ring restraint and split back-up ring cast of 65-45-12 grade ductile iron per ASTM A536 - Armorguard e-coat applied epoxy
- Rods (included) - High strength, low alloy steel per ANSI/AWWA C111/A21.11
- Rated at full-rated pressure of any class PVC pipe, minimum 2:1 safety factor
- Fits standard C907 fittings

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

12/12/17

Submitted By: