

Bren Technologies

PROTECT YOUR WELD...

thermOwelds® *NEW* thermOcap is designed to cover your exothermically welded connection.

- Elongated wire inlet allows the cap to conform easier to the pipe
- Outer shell designed to prevent crushing
- Butyl rubber filled dome
- Easier field application

"Contractor Friendly"

For More Information: 1-866-438-6685




FACT:

Convenient Packaging

- Packed in boxes of 20
- Immediate delivery available



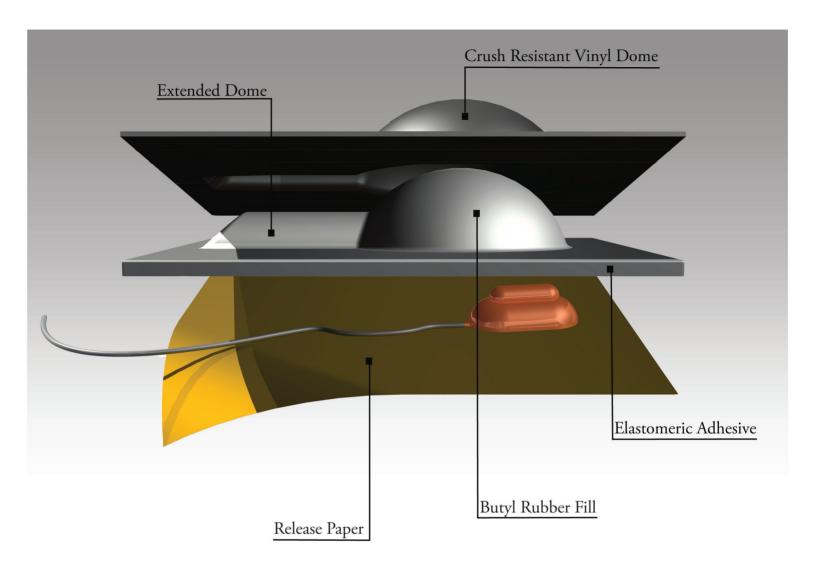

Properties:

Construction - Molded plastic dome filled with corrosion resistant compound on a base of thick elastomeric tape.

Dimensions: Overall: 4"x 4" Application Temperature: 35° F to 170° F

Sheet Thickness: 21 mils Service Temperature: -20° F to 225° F

Plastic Dome: 15/8"x 5/8" H*eight:* 2 3/4"

Wire Way: 3/8" x 1 3/8" Adhesive Thickness: 1/8"



FACT:

Thicker outer shell that prevents crushing during application.

